
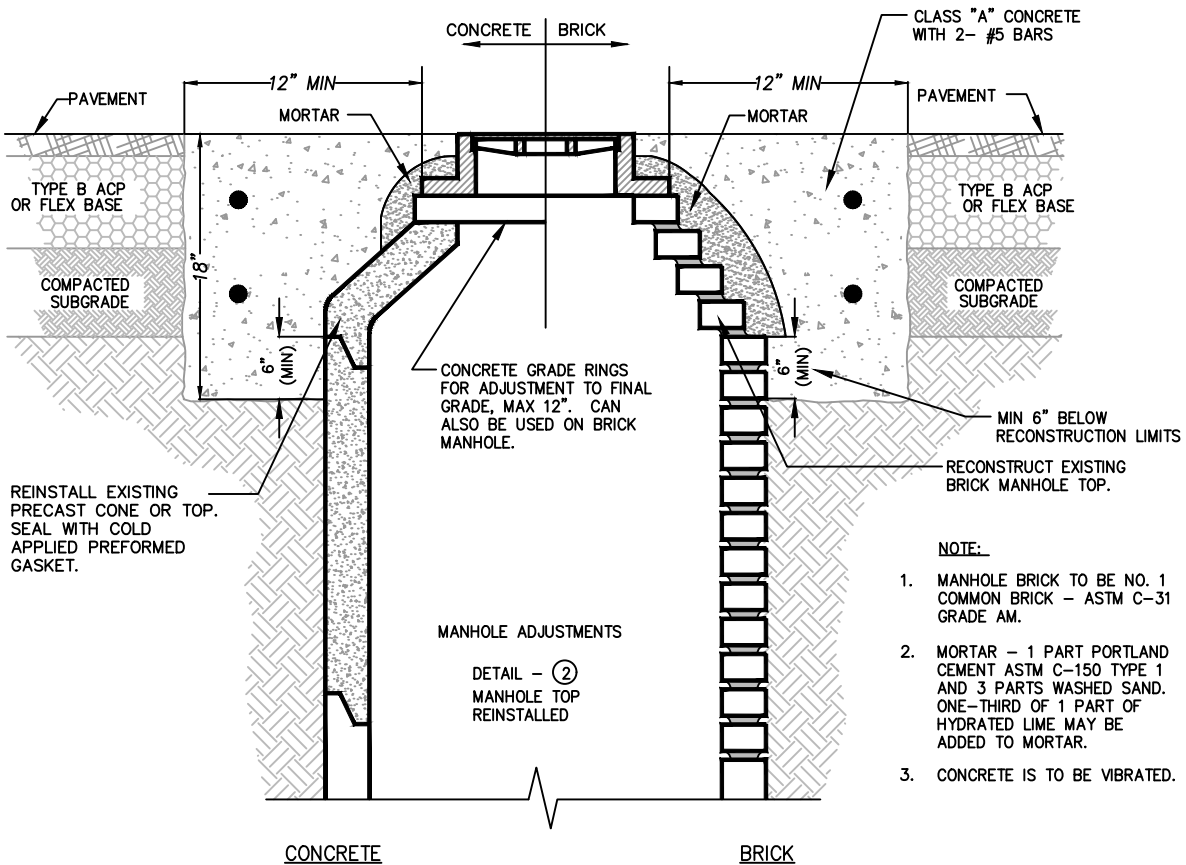


MANHOLE ADJUSTMENTS FOR NEW PAVEMENT CONSTRUCTION

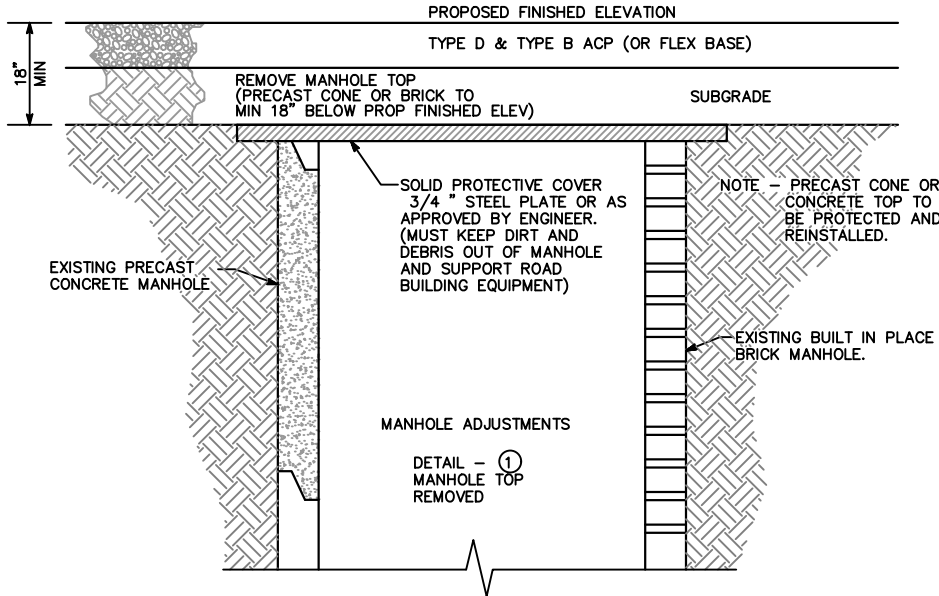

- NOTE:**
1. MANHOLE BRICK TO BE NO. 1 COMMON BRICK - ASTM C-31 GRADE AM.
 2. MORTAR - 1 PART PORTLAND CEMENT ASTM C-150 TYPE 1 AND 3 PARTS WASHED SAND. ONE-THIRD OF 1 PART OF HYDRATED LIME MAY BE ADDED TO MORTAR.
 3. CONCRETE IS TO BE VIBRATED.

MANHOLE ADJUSTMENTS

DRAWN BY: sOdom
 DATE: Dec., 27, 2006
 SCALE: N T S