


## EXISTING BRICK MANHOLE DEMOLITION DETAIL

SCALE: N.T.S.

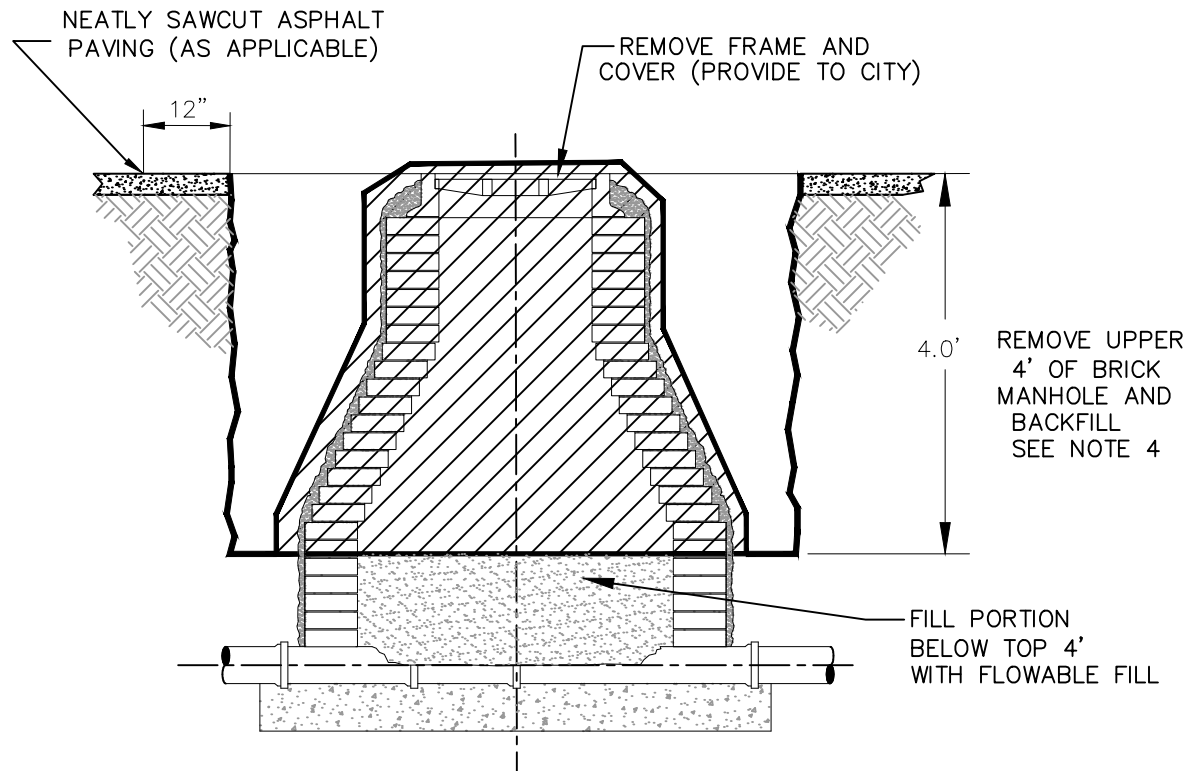

### NOTES:

1. PROTECT EXISTING STRUCTURES AND PIPING WHICH ARE TO REMAIN. CONTRACTOR SHALL REPLACE ITEMS DAMAGED BY CONSTRUCTION AT NO COST TO OWNER.
2. EXISTING MANHOLES SHALL NOT BE DEMOLISHED OR FILLED WITH FLOWABLE FILL UNTIL OWNER HAS APPROVED IT AND ALL PIPELINES IN AND OUT OF MANHOLE HAVE BEEN FILLED WITH FLOWABLE FILL.
3. BACKFILL IN TOP 4 FEET SHALL BE COMPACTED EARTH FILL. FOR PAVED AREAS, TOP 12" SHALL BE CEMENT STABILIZED SAND WITH 2" HOTMIX ASPHALT PAVING.
4. MANHOLE MATERIAL FROM TOP 4 FEET SHALL BE DISPOSED OF OFFSITE. BRICKS, MORTAR, CONCRETE ETC. SHALL NOT BE LEFT IN MANHOLE EXCAVATION.